

Paypal einrichten

Beschreibung:

Zahlungsmethode PayPal einrichten.

Vorraussetzung:

ein PayPal Geschäftskonto mit API Zugriff.

Siehe : <https://developer.paypal.com/dashboard/applications/sandbox>

Dort dann die Client ID und den Secret notieren bzw kopieren

You're in sandbox mode.

API Credentials Create App

! Viewing sandbox API credentials. [View live credentials.](#)


REST API apps

| App name | Client ID | Secret | |
|---------------------|------------|------------|---|
| Default Application | [REDACTED] | [REDACTED] | ⋮ |


Express Checkout via Braintree SDK - Sandbox Accounts

Installation:


In Hostbill unter konfigurartion Module gehen

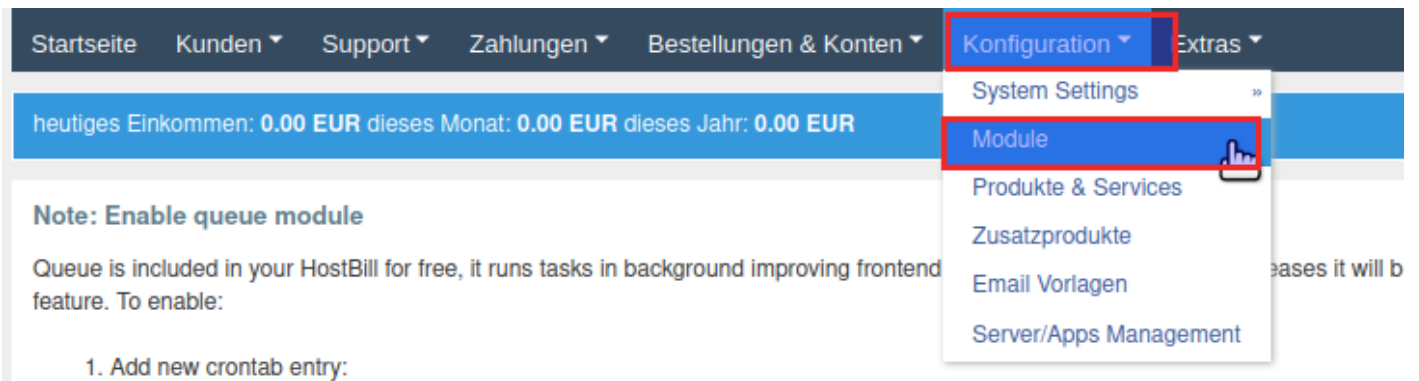

Dann auf Zahlungsmodule und dann inaktiv auswählen

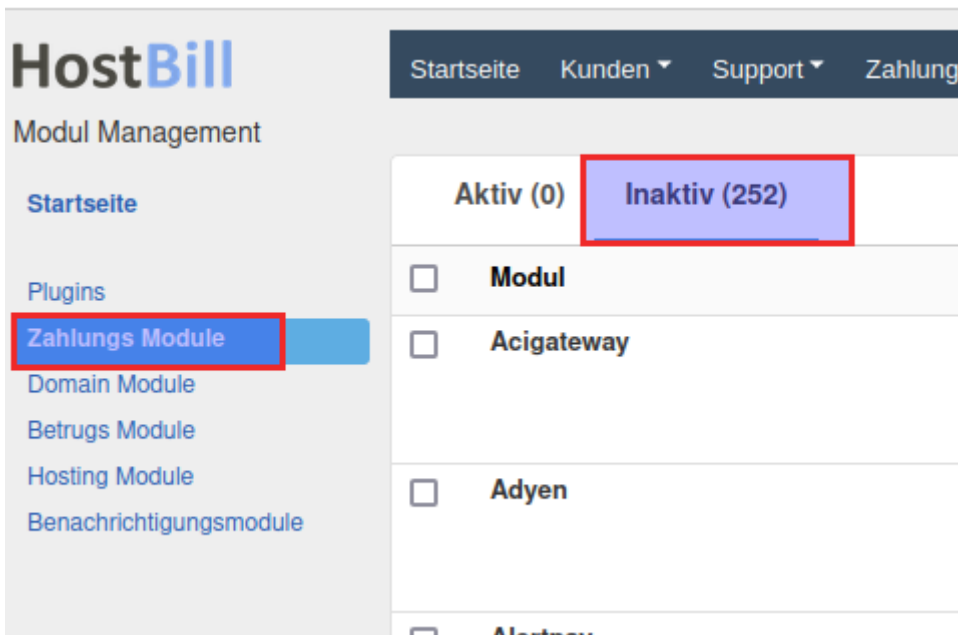

Nun mit STRG+F nach paypal suchen bis wir bei paypal checkout sind.
Dort auf aktivieren klicken

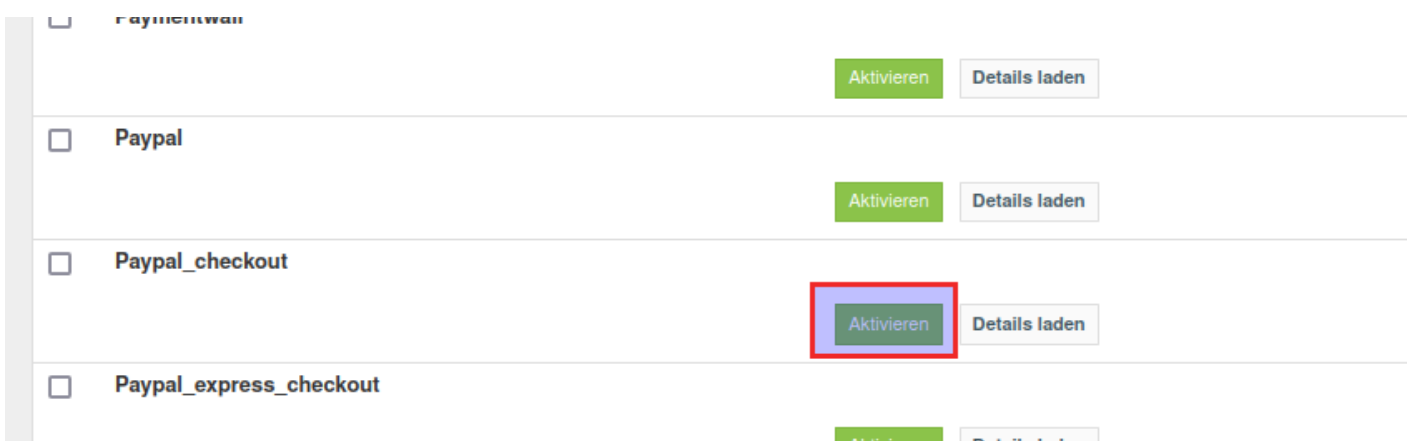

Nun in den Einstellungen

locale : de_DE

Sandboxmode : haken rein nur zum testen wenn alles funktioniert live Daten rein

Client ID : die paypal id

Secret : Das Secret / Secret 1

Noch nicht auf speichern klicken, geht dann noch weiter

[Konfiguration bearbeiten](#) [Deaktivieren](#) Additional features:
Version: 2.2023-04-07 **Dateiname:** class.paypal_checkout
Unterstützte Währungen: AUD, CAD, EUR, GBP, JPY, U

Modul Display Name: [Add translation](#)

Button layout:

Button color:

Button size:

Button shape:

Button label:

Locale:

Disable Subscriptions:

Disable Pay now:

Terminate subscriptions:

Sandbox mode:

Client ID:

App secret:

Webhook ID:

Update client details from callback:

Disable pre-authorization:

Background conversion:

Force background conversion:

Rücksprungadresse:

[Änderungen speichern](#)

In der Rücksprungadresse ist die Adresse die Pay paypal als Webhook eingerichtet werden muss. Diese kopieren.

Background conversion:


Force background conversion:

Callback URL:

Nun bei PayPal in einem neuen Tab einloggen und ins Developer einloggen

<https://developer.paypal.com/dashboard/applications/sandbox>

Oben ist ein Schiebeschalter der sollte erst auf Sandbox stehen. Dann auf die Default Application klicken (können wir auch gleich umbenennen)



API Credentials

Create App

Viewing sandbox API credentials. [View live credentials.](#)

REST API apps

| App name | Client ID | Secret | |
|---------------------|-----------------------------------|--------|---|
| Default Application | ARZmgelZ-7EYI-V4kBs7UJi3SeiUBV... | | ⋮ |

Express Checkout via Braintree SDK - Sandbox Accounts


Note: You can link a maximum of five Braintree SDK sandbox access tokens to your PayPal account. You can generate only one Braintree SDK sandbox access token for each PayPal sandbox account.

Über den Stift können wir die Application umbenennen wenn man möchte

Default Application

Viewing sandbox API credentials. [View live credentials.](#)

API credentials

App name Default Application 

Nun umbenennen und speichern

Default Application

! Viewing sandbox API credentials. [View live credentials.](#)

API credentials

App name

HostBill

Save

Cancel

Umbenannt ;-)

API credentials

✔ Application was saved successfully


App name

HostBill 

Nun runter scrollen bis zum Abschnitt Webhooks und auf Add Webhook klicken.

Sandbox Webhooks

Configure webhooks to notify your app when certain events occur. To configure a webhook, define your webhook listener URL and a list of events for which to listen. You can configure up to ten webhooks. Each webhook can subscribe to either specific events or all events. To learn more about webhooks, see [webhooks notifications](#).

| Webhook | Webhook ID | Events Tracked |  |
|---|------------|----------------|---|
| You do not have any events for the selected application | | | |

Add Webhook

Nun webhook url eintragen und auswählen welche Ereignisse übermittelt werden dann runterscrollen auf save klicken.

- From the **event types** list, select:
 1. Checkout order approved
 2. Billing subscription cancelled
 3. Billing subscription expired
 4. Payment capture completed
 5. Payment capture denied
 6. Payment capture declined
 7. Payment sale completed

8. Payment sale denied
9. Payment sale pending
10. Payment sale refunded
11. Payment sale reversed



Add webhook


i Make sure that you entered the correct URL to receive webhooks when events occur in your account. You must keep the URL up-to-date and are responsible for the safety and security of the data that you transmit through webhooks.

files/Payment/paypal_checkout/callback/callback.php

Event types:

All Events
This is a wildcard event. Selecting this will subscribe you to all future events.

Billing plan 

Billing subscription 

Billing subscription activated

Billing subscription cancelled

Billing subscription created

Billing subscription expired

Billing subscription payment failed

Checkout



Checkout checkout buyer-approved

Checkout order approved

Checkout order completed

Checkout order saved

Checkout order voided

Payments & Payouts



- Payment refund pending
- Payment sale completed
- Payment sale denied
- Payment sale pending
- Payment sale refunded
- Payment sale reversed
- Payment payoutsbatch denied
- Payment payoutsbatch processing
- Payment payoutsbatch success
- Payment refund cancelled
- Payment refund completed
- Payment refund denied
- Payment refund failed
- Payment authorization created



- Payment refund completed
- Payment refund denied
- Payment refund failed
- Payment authorization created
- Payment authorization voided
- Payment capture completed
- Payment capture declined
- Payment capture denied
- Payment capture pending
- Payment capture refunded
- Payment capture reversed

Nach drücken auf save haben wir dann unsere Webhook ID

Sandbox Webhooks

✔ Webhook added successfully

Configure webhooks to notify your app when certain events occur. To configure a webhook, define your webhook listener URL and a list of events for which to listen. You can configure up to ten webhooks. Each webhook can subscribe to either specific events or all events. To learn more about webhooks, see [webhooks notifications](#).

| Webhook | Webhook ID | Events Tracked | |
|---|------------|---|---|
| <code>https://www.strange-hosting.com/includes/modules/Payment/paypal_checkout/callback/callback.php</code> | U9435 | Billing subscription cancelled, Billing subscription expired, Checkout order approved, Payment capture completed, Payment capture declined, Payment capture denied, Payment sale completed, Payment sale denied, Payment sale pending, Payment sale refunded, Payment sale reversed |   |

Add Webhook

Nun gehen wir wieder in unsere Hostbill Payment Einstellungen zurück und tragen dort unsere gerade eben bekommene WEBHOOKID ein. Dann speichern

Webhook ID: ? 13570

Update client details from callback: ?

Disable pre-authorization: ?

Background conversion: ? None. Disable conversion ▼

Force background conversion: ?

Callback URL: <https://www.strange-hosting.com/includes/modules/Pa>

Save Changes

Wenn das ganze funktioniert, einfach von Sandbox auf Live Modus wechseln indem Credentials und Webhook ausgetauscht werden. Haken Sandbox entfernen. Abfahrt

Achtung: Der Webhook muss auch im Live Modus bei PayPal erstellt werden und wenn der Haken Sandbox rausgenommen wird nicht nur die API Credentials sondern auch der WEBHOOK ausgetauscht werden!!!

Version #4

Erstellt: 12 Oktober 2023 09:14:06 von Admin

Zuletzt aktualisiert: 13 Oktober 2023 09:58:15 von Admin